


# wallypower50


Main technical specifications – PRELIMINARY DATA



TOP VIEW

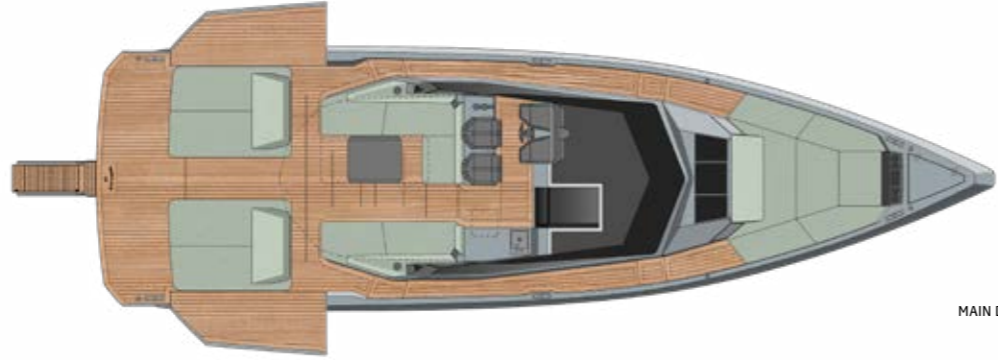

MAIN DECK

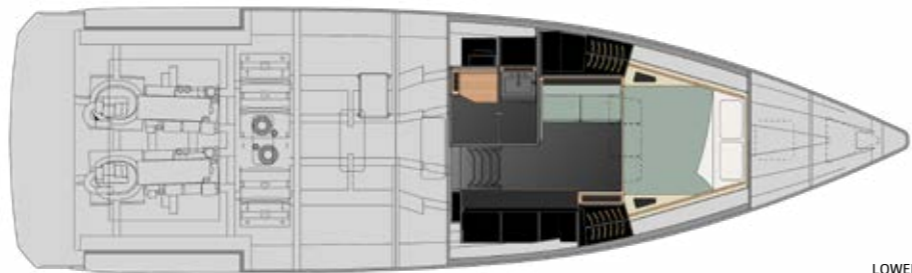

LOWER DECK

## Engines

2 x VOLVO PENTA IPS650 power 480 mhp / 353 kW at 3700 rpm

## Speed (knots)

	VOLVO IPS 650	
Maximum speed	knots	36
Cruising speed	knots	30

## Range (nautical miles)

	VOLVO IPS 650	
Maximum speed	n.m.	250
Cruising speed	n.m.	280

## Main sizes

Loa = overall length (standard ISO 8666)	14,6	m.	47 ft. 11 in.
Lh = Hull length (standard ISO 8666)	14,6	m.	47 ft. 11 in.
Lwl = waterline length (boat fully laden)	13,4	m.	44 ft. 0 in.
Maximum beam	4,3	m.	14 ft. 1 in.
Depth under propellers (boat fully laden)	1,3	m.	4 ft. 1 in.
Displacement unladen	12,9	ton./lb.	28440
Displacement laden	16,2	ton./lb.	35715
Maximum number of persons on board	12		
Design category Directive 2013/53/EU	B		
Certification modules	B + F		RINA S.p.A.

## Technical data

Hull type: warped hull with spray rails and aft deadrise	18	°	
H = Overall height	5,3	m.	17 ft. 3 in.
P = pulpit + transom	0,0	m.	0 ft. 0 in.
Fuel tank capacity	1400	lt./US gals.	370
Water tanks capacity	240	lt./US gals.	63

## Performance specifications

The performance is estimated at the following conditions:

standard version displacement of the yacht: at 1/3 of load, clean hull, 25°C air temperature, good weather conditions, 4 persons on board	13,8	ton./lb.	30362
overloading the yacht by	0,5	ton./lb.	1102
top speed decreases of	1	knot	

The Technical data, performances, designs and graphic reproductions are purely indicative, are not contractual, shall not constitute in any circumstances whatsoever any contractual offer by the shipyard and refer to European standard models of motor yachts built by the shipyard. The only valid technical reference or description is the specific parameters of each motor yacht cited only on purchase of the same. Therefore the only indications binding on the seller are contained solely in the sale agreement and in the relevant specific manual.