



SPECIFICATIONS

Length overall w/ swim platform excl. anchor roller	10.96 M / 36' 0"
Hull length	9.94 M / 32' 7"
Beam overall	4.45 M / 14' 7"
Length of waterline	9.3 M / 30' 6"
Height above waterline w/ hard top (excludes electrics and electronics)	3.05 M / 10' 0"
Hull draft with outboards up	60 CM / 2' 0"
Light displacement	6,608 KG / 14,568 LB
Fully loaded displacement	9,785 KG / 21,572 LB
CE certification	B:8, C:18, D:26
Sleeps (up to)	6 (2 in salon)
Max passengers	26
Cabins	2
Heads	2
Showers	3

ENGINES

2X Black 300 HP V8 Mercury Outboards

2X White 300 HP V8 Mercury Outboards with Joystick Piloting

2X White 400 HP L6 Mercury Outboards with Joystick Piloting

TANKAGE

Fuel tank (approx.)	2X 675 = 1350 L / 2X 178 = 356 GAL
Water tank standard (approx.)	200 L / 52 GAL
Water tank max (optional)	485 L / 128 GAL
Holding tank (approx.)	2X 80 L / 2X 21 GAL

CONSTRUCTION

Resin infused hull and deck construction creating high strength and stiffness

Solid FRP lamination at hull centerlines including all through hulls

Vinylester resin with excellent corrosive and water resistant properties

NPG gelcoat with superior UV resistance

Resin infused bulkheads


All main FRP components resin infused construction including bulkheads

Windows in hull and deck high quality acrylic meeting ISO standards

The specification measurements are approximate and subject to variance.



MAIN DECK

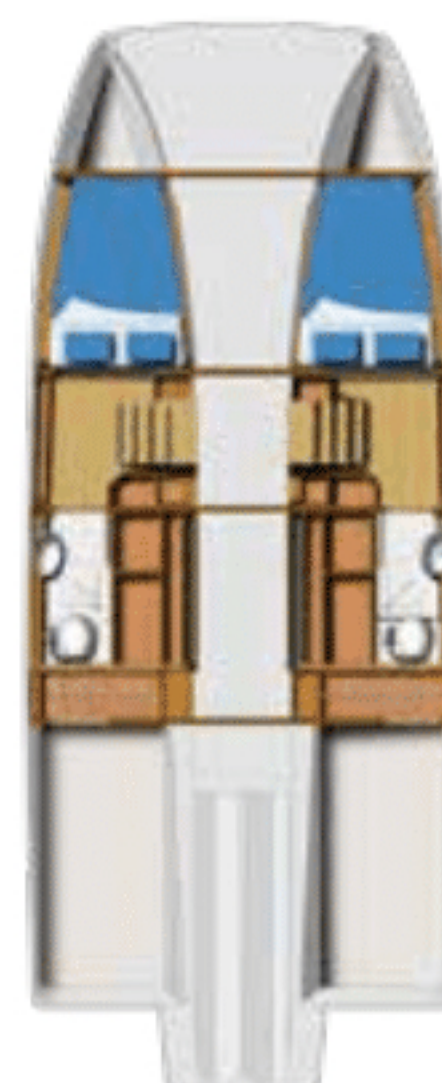

CABIN



FISHING VERSION